



MESAD GROUP

www.mesadgroup.com

CATALOGUE

Marble & Granite

The image features a dark gray background with white line art depicting several irregular, block-like shapes that resemble granite pieces. These shapes are arranged in a row, with some overlapping. A thin, light-colored horizontal line runs across the bottom of the composition. The word "Granite" is centered in a large, white, sans-serif font, with a thin, light-colored horizontal line underneath the first few letters.

Granite



VERDI LIGHT



The image features a close-up, high-resolution view of a granite surface. The granite has a complex, multi-colored pattern with shades of beige, tan, and light brown, interspersed with numerous small, dark black and dark grey spots. The texture appears crystalline and slightly uneven. A dark grey, semi-transparent rectangular overlay is positioned in the center of the image, containing white text. The text is organized into several lines, with the first line being a bold section header. The background granite is visible through the semi-transparent overlay.

TECHNICAL DATA

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered

Tumbled, Striped, Split face and Flamed

VERDI





TECHNICAL DATA

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered
Tumbled, Striped, Split face and Flamed

GANDOLA



The image features a close-up, high-resolution view of a granite surface with a complex pattern of orange, black, and white mineral grains. A dark grey semi-transparent rectangular box is overlaid on the center of the image, containing white text. The text is organized into several lines, with the first line being a bold section header. The remaining lines are in a standard weight font. The background granite texture is visible through the semi-transparent box.

TECHNICAL DATA

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered

Tumbled, Striped, Split face and Flamed

GREY ELSHERKA



TECHNICAL DATA


COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered
Tumbled, Striped, Split face and Flamed

ROSA NASR

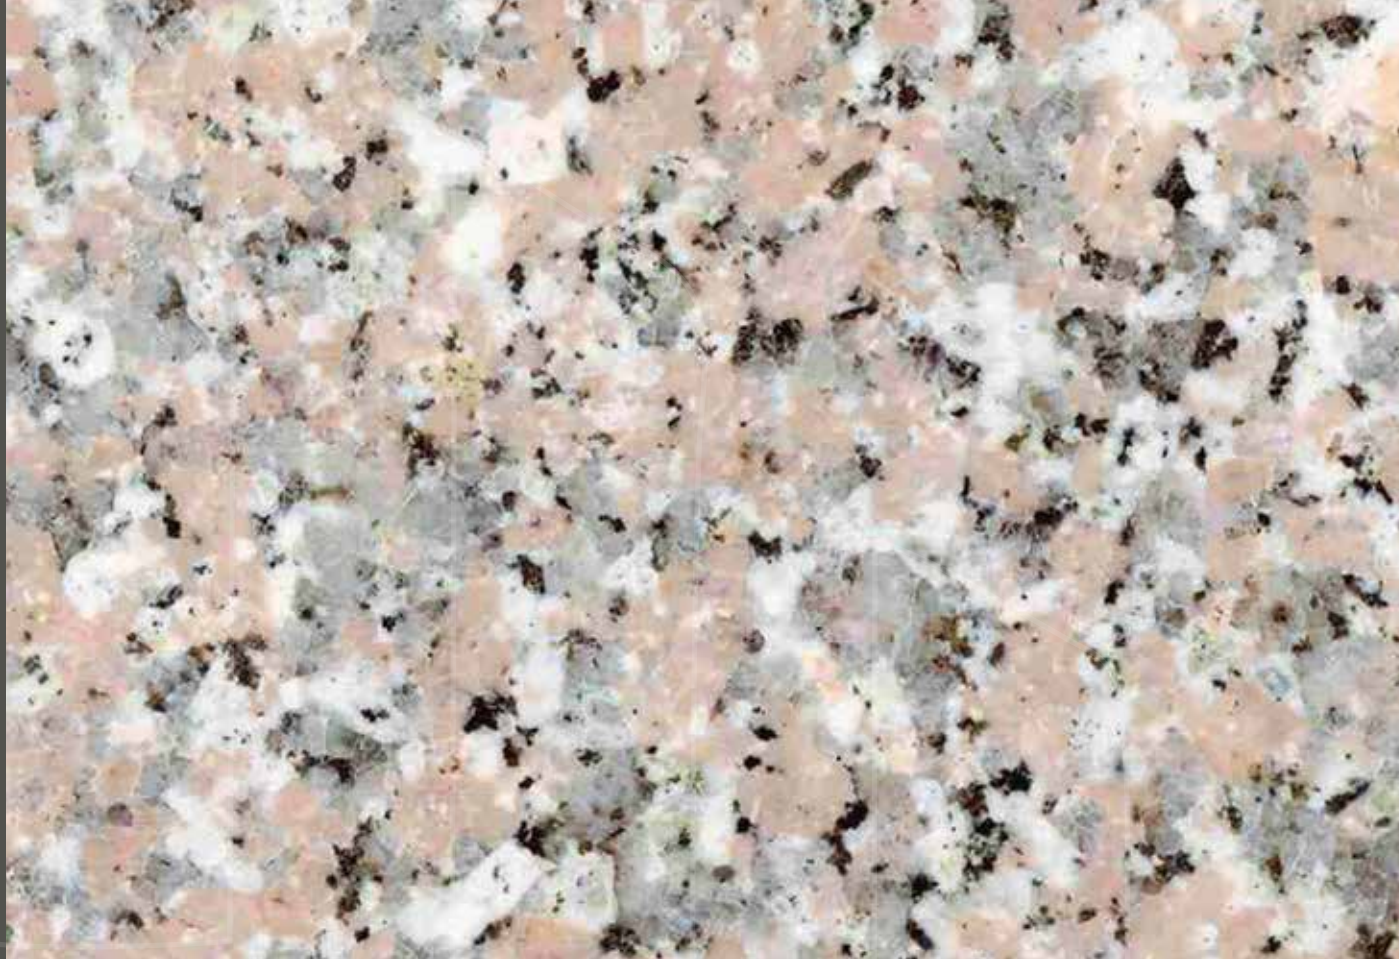



TECHNICAL DATA

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered
Tumbled, Striped, Split face and Flamed

ROSA HODI





TECHNICAL DATA

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered
Tumbled, Striped, Split face and Flamed

BIANCO HALAYEB



TECHNICAL DATA


COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered
Tumbled, Striped, Split face and Flamed

NEW HALAYEB

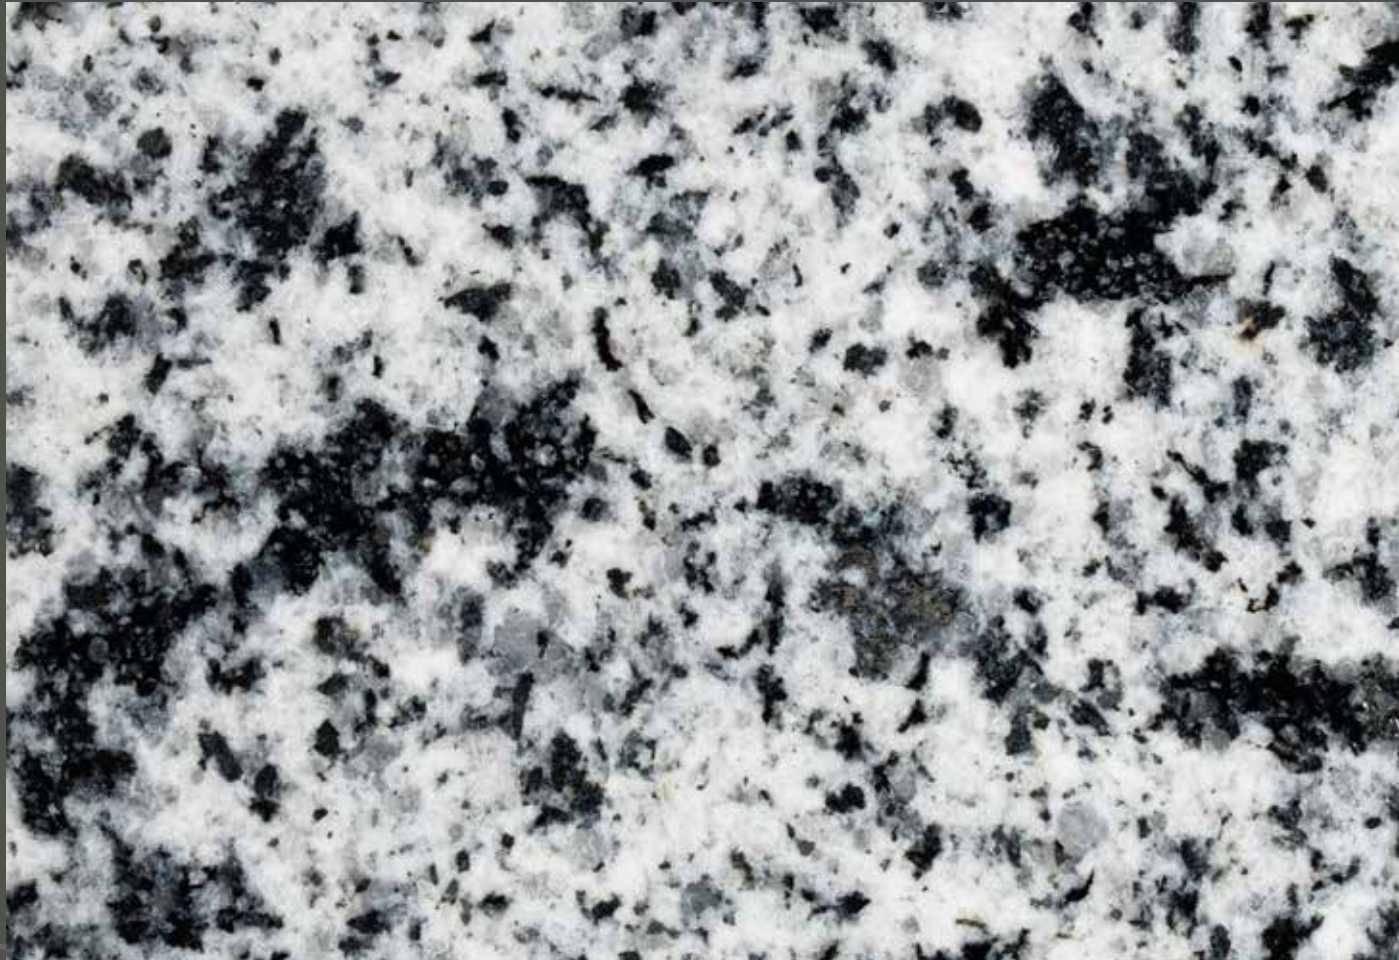

TECHNICAL DATA

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered

Tumbled, Striped, Split face and Flamed

RED SWAN



TECHNICAL DATA


COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered
Tumbled, Striped, Split face and Flamed

BLACK SWAN

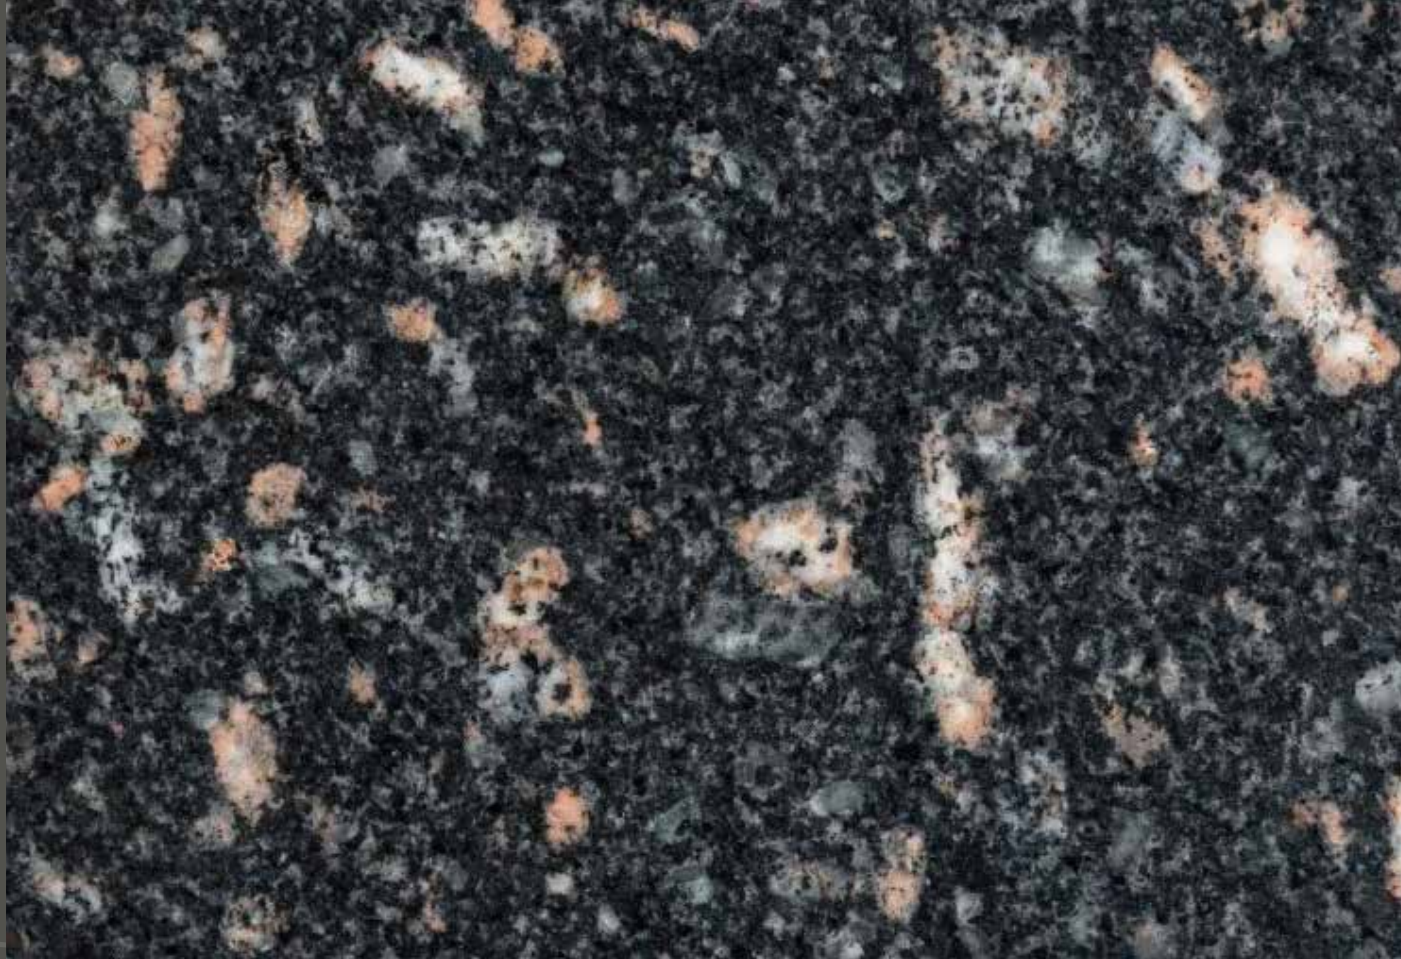

TECHNICAL DATA

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM (UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Acid, Sandblasted, Bush Hammered
Tumbled, Striped, Split face and Flamed



Marble



TREISTA (SINAI PEARL)



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 19 800 PSI

ABRASION RESISTANCE (AST C241/C 1353): 38.8HA

WATER ABSORPTION (ASTM C97): 0.89 %

FLEXURAL STRENGTH(ASTM C880): 1900 PSI

DENSITY (ASTM C97): 2628

MODULUS OF RUPTURE (ASTM C99): 1900 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

SAMAHA LIGHT



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 20 200 PSI

ABRASION RESISTANCE (AST C241/C 1353): 33.9HA

WATER ABSORPTION (ASTM C97): 0.29 %

FLEXURAL STRENGTH(ASTM C880): 1600 PSI

DENSITY (ASTM C97): 2.662

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

KHATEMYA



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 15 600 PSI

ABRASION RESISTANCE (AST C241/C 1353): 33.9HA

WATER ABSORPTION (ASTM C97): 1.31 %

FLEXURAL STRENGTH(ASTM C880): 1400 PSI

DENSITY (ASTM C97): 2.567

MODULUS OF RUPTURE (ASTM C99): 1600 PSI


COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

ZAFARANA ROSE

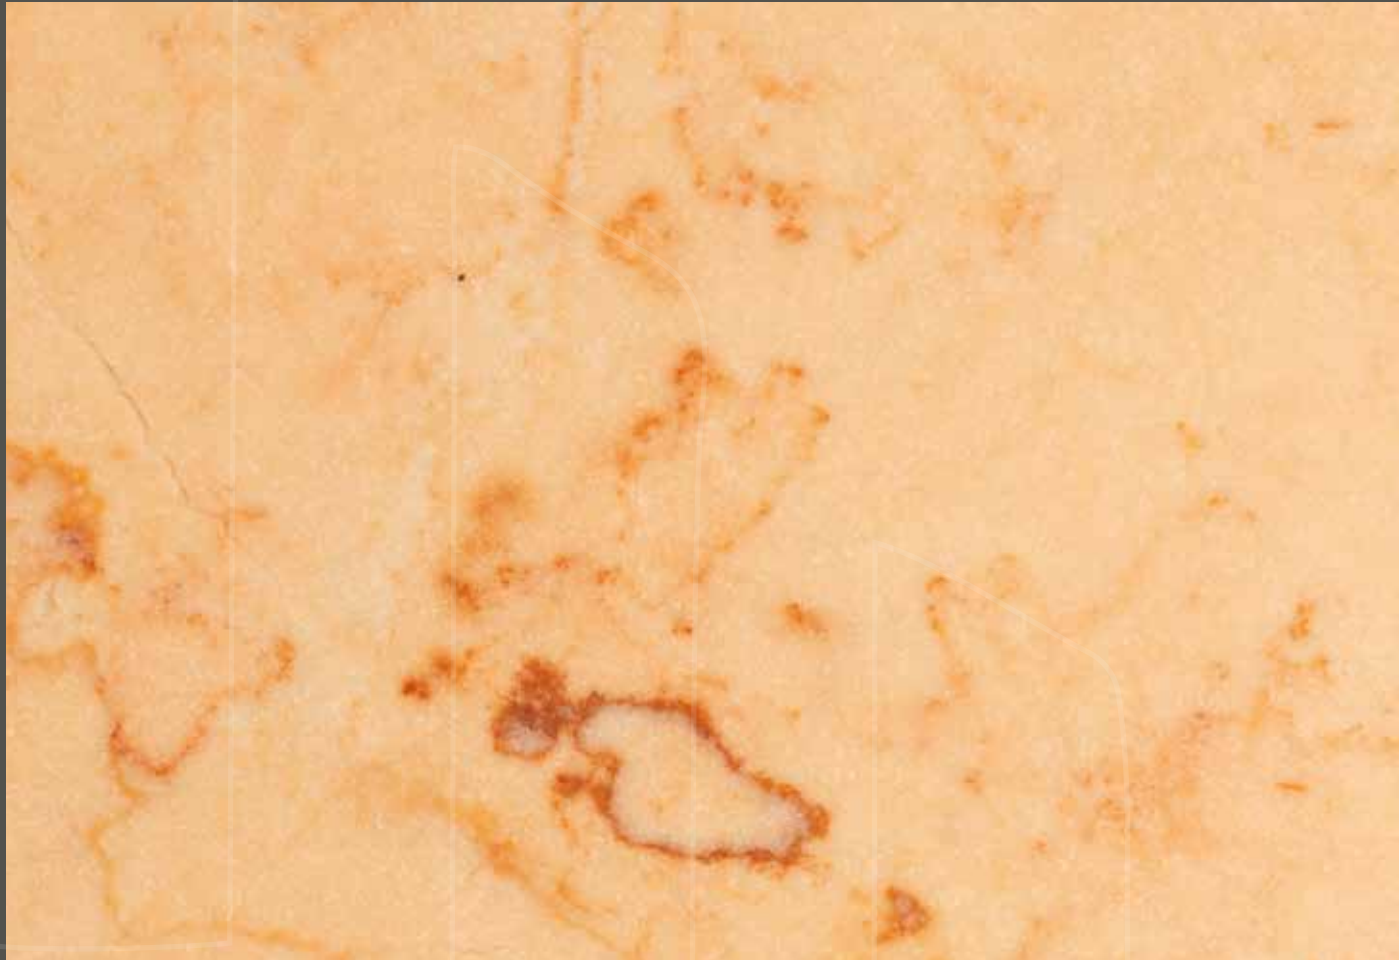

STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 20 200 PSI

ABRASION RESISTANCE (AST C241/C 1353): 33.9HA

WATER ABSORPTION (ASTM C97): 0.05 %

FLEXURAL STRENGTH(ASTM C880): 2300 PSI

DENSITY (ASTM C97): 2662

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

ZAFARANA CREAM



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 20 200 PSI

ABRASION RESISTANCE (AST C241/C 1353): 33.9HA

WATER ABSORPTION (ASTM C97): 0.05 %

FLEXURAL STRENGTH(ASTM C880): 2300 PSI

DENSITY (ASTM C97): 2662

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

SUNNY DARK



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 13 300 PSI

ABRASION RESISTANCE (AST C241/C 1353): 26.4HA

WATER ABSORPTION (ASTM C97): 0.29 %

FLEXURAL STRENGTH(ASTM C880): 1600 PSI

DENSITY (ASTM C97): 2618

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

SUNNY MEDIUM



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 13 300 PSI

ABRASION RESISTANCE (AST C241/C 1353): 26.4HA

WATER ABSORPTION (ASTM C97): 0.29 %

FLEXURAL STRENGTH(ASTM C880): 1600 PSI

DENSITY (ASTM C97): 2618

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

SUNNY LIGHT



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 13 300 PSI

ABRASION RESISTANCE (AST C241/C 1353): 26.4HA

WATER ABSORPTION (ASTM C97): 0.29 %

FLEXURAL STRENGTH(ASTM C880): 1600 PSI

DENSITY (ASTM C97): 2618

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

SUNNY MENIA DARK



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 20 200 PSI

ABRASION RESISTANCE (AST C241/C 1353): 33.9HA

WATER ABSORPTION (ASTM C97): 0.29 %

FLEXURAL STRENGTH(ASTM C880): 1600 PSI

DENSITY (ASTM C97): 2.662

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

SUNNY MENIA LIGHT



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 20 200 PSI

ABRASION RESISTANCE (AST C241/C 1353): 33.9HA

WATER ABSORPTION (ASTM C97): 0.29 %

FLEXURAL STRENGTH(ASTM C880): 1600 PSI

DENSITY (ASTM C97): 2.662

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

SILVIA MENIA



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 13 300 PSI

ABRASION RESISTANCE (AST C241/C 1353): 26.4HA

WATER ABSORPTION (ASTM C97): 0.29 %

FLEXURAL STRENGTH(ASTM C880): 1600 PSI

DENSITY (ASTM C97): 2618

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

GALALA CREAM



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 17 600 PSI

ABRASION RESISTANCE (AST C241/C 1353): 31.6HA

WATER ABSORPTION (ASTM C97): 0.17 %

FLEXURAL STRENGTH(ASTM C880): 1250 PSI

DENSITY (ASTM C97): 2675

MODULUS OF RUPTURE (ASTM C99): 1800 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

GALALA LIGHT (EXTRA)



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 17 600 PSI

ABRASION RESISTANCE (AST C241/C 1353): 31.6HA

WATER ABSORPTION (ASTM C97): 0.17 %

FLEXURAL STRENGTH(ASTM C880): 1250 PSI

DENSITY (ASTM C97): 2675

MODULUS OF RUPTURE (ASTM C99): 1800 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

MELLY GREY FOSSILS



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 20 200 PSI

ABRASION RESISTANCE (AST C241/C 1353): 33.9HA

WATER ABSORPTION (ASTM C97): 0.05 %

FLEXURAL STRENGTH(ASTM C880): 2300 PSI

DENSITY (ASTM C97): 2662

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

KATRINA



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 20 200 PSI

ABRASION RESISTANCE (AST C241/C 1353): 33.9HA

WATER ABSORPTION (ASTM C97): 0.05 %

FLEXURAL STRENGTH(ASTM C880): 2300 PSI

DENSITY (ASTM C97): 2662

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

DESERT



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 15 600 PSI

ABRASION RESISTANCE (AST C241/C 1353): 26.5HA

WATER ABSORPTION (ASTM C97): 1.31 %

FLEXURAL STRENGTH(ASTM C880): 1400 PSI

DENSITY (ASTM C97): 2.567

MODULUS OF RUPTURE (ASTM C99): 1600 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

FELLETO HASSNA



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 13 300 PSI

ABRASION RESISTANCE (AST C241/C 1353): 26.4HA

WATER ABSORPTION (ASTM C97): 0.29 %

FLEXURAL STRENGTH(ASTM C880): 1600 PSI

DENSITY (ASTM C97): 2618

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed

FELLETO SELSELA



STANDARD SPECIFICATIONS & TECHNICAL DATA:-

COMPRESSIVE STRENGTH (ASTM C 170): 13 300 PSI

ABRASION RESISTANCE (AST C241/C 1353): 26.4HA

WATER ABSORPTION (ASTM C97): 0.29 %

FLEXURAL STRENGTH(ASTM C880): 1600 PSI

DENSITY (ASTM C97): 2618

MODULUS OF RUPTURE (ASTM C99): 2000 PSI

COUNTRY OF ORIGIN: Egypt

MATERIAL AVAILABILITY: Blocks, Slabs, Tiles

THICKNESS OF THE TILES: 10-12-15-20-30-40MM
(UP TO 200MM BY ORDER)

SURFACE FINISHES: Polished, Unpolished, Honed, Brushed, Bash Hammered, Tumbled, Striped, Split face and Flamed





Thank You



MESAD GROUP

www.mesadgroup.com

• **Contacts**

 +90 543 668 13 18

 +90 532 449 13 18

 www.mesadgroup.com.tr  adiyamanmesut@gmail.com

• **Social Media Pages**

 Mesad Mesad Trade  MESADGROUP